

SVCam-svs 11002

SVCam-HR Line



Compact 11 Megapixel Camera



This digital Machine Vision camera models have a resolution of 4008 x 2672 pixel.

The cameras are designed to reach high frame rates at an excellent signal-to-noise ratio and are enclosed in a small housing.

Correlated Double Sampling (CDS) and 2 x 14 Bit A/D converters guarantee an excellent signal-to-noise ratio.

The internal logic allows different ways to adjust exposure time and select trigger modes including:

- > Synchronization of image capture to an external event (trigger mode)
- > "Free running" with maximum frame rate
- > Exposure time control via serial interface or by trigger pulse width
- > Longer exposure times up to under low light level conditions



GEN<i>i>CAM



Technical Highlights/Technical Data

- > Progressive Scan technology
- > Resolution: 4008 x 2672 pixel
- > Synchronization:
 - "Free running" (frame rate adjustable)
 - External trigger with internal exposure control
 - External trigger with pulse width exposure control
 - Software trigger via PC (GigE)
- > Housing dimensions:
 - GigE Version: 70 mm x 71 mm x 53.2 mm
 - CameraLink: 65 mm x 67 mm x 45 mm
- > Monochrome and color sensors (Bayer Pattern)
- > 12 Bit video data stream (using 14 Bit ADC)
- > 256 MB Memory inside(GigE Version)
- > Internal LUT operations (GigE Version)
- > Internal shading correction (GigE Version)
- > Internal Memory: 256 MB RAM / 8MB Flash + 128 MB Flash
- > Pixel defect correction (GigE Version)
- > Adjustable gain
- > Adjustable clock speed (64/48/40/30 Mhz, model dependend) (GigE)
- > 1/2 tap switchable („H“ version)
- > Low offset
- > Binning mode
- > Partial scan mode for higher frame rates (Camera Link)
- > Area of Interest (AOI) (GigE Version)
- > M58 x 0.75 Mount (optional F-Mount adapter)
- > 12V DC @ approx. 800mA consumption (model dependend)
- > Broad voltage input possible (+10V to +30V DC)(GigE Version)
- > Operating temperature range: -10°C to +40°C
- > Full 2 years warranty

SVS-VISTEK GmbH

82229 Seefeld/Germany
Tel. +49-(0) 81 52-99 85-0,
Fax +49-(0) 81 52-99 85-79
info@svs-vistek.com
www.svs-vistek.com

Scale your vision.

Overview


SVCam-svs11002	GigE Version			Camera Link Version		
Camera Type	svs11002XSGEV2	svs11002XFGEV2	svs11002XUGEV2	svs11002XOLCPC2	svs11002XTLCPC2*	svs11002XTHCPC**
Resolution	4008 x 2672	4008 x 2672	4008 x 2672	4008 x 2672	4008 x 2672	4008 x 2672
Frame Rate (Hz, max.)	3.3	4.7	6.1	4.1	7.8	10
Pixel (μm^2)	9 x 9	9 x 9	9 x 9	9 x 9	9 x 9	9 x 9
CCD-Size Equivalent	43.3 mm diag.	43.3 mm diag.	43.3 mm diag.	43.3 mm diag.	43.3 mm diag.	43.3 mm diag.
Exposure Time internal	130 μs - 2 s	130 μs - 2 s	130 μs - 2 s	202 μs - 8 min	202 μs - 8 min	202 μs - 8 min
Exposure Time external	130 μs - ∞	130 μs - ∞	130 μs - 1 s	170 μs - ∞	110 μs - 1 s	110 μs - 1 s

X = Monochrome, X = Color *2 x 48 MHz, max. **2 x 64 MHz
 Cameras make use of high performance CCD made by **Truesense Imaging, Inc.**®, formerly **Kodak** (USA). For more camera types see our SVCam-HR product overview.

Operation Modes


Mode: Free Running/Fixed Frequency

In this mode the camera creates all sync signals itself. Camera is connected to PC and will create images immediately.




Mode: External Trigger, Internal Exposure Control

The camera needs an external trigger to output images. The exposure time is set by the internal logic inside the camera.

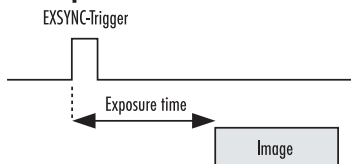

Mode: External Trigger, External Exposure Control


The camera needs an external trigger to output images. The exposure time is determined by the pulse width of the trigger signal and can be changed from frame to frame.



Mode: Software Trigger (GigE only)

The PC sends a command to the camera in order to get data. Internal logic is set for the exposure time. Jitter must be observed.

Dimensions [mm]

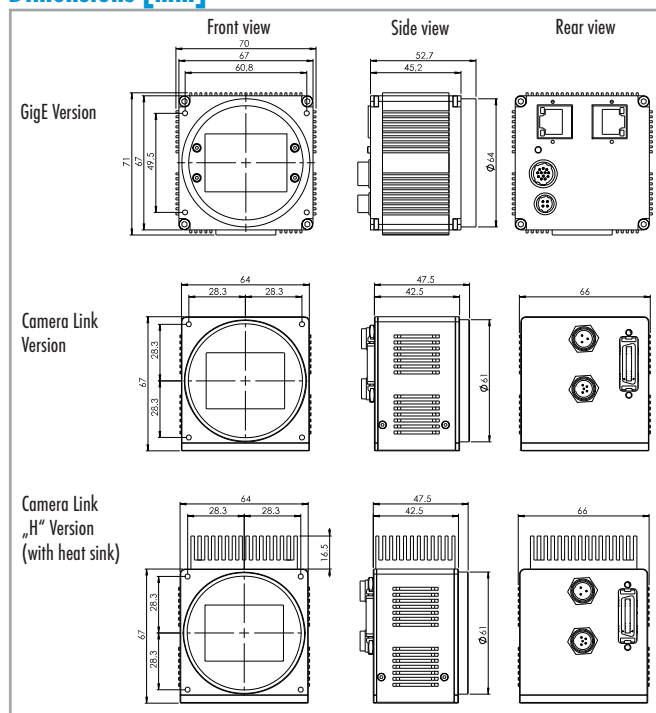

Connector pin-out (HR 10A-10R-12PB, HR 10A-7R-4PB)

Version	Pin	Signal	Pin	Signal
GigE Version	1	VIN- (GND)	7	OUT1 (TTL Level)
	2	VIN+ (10V to 25V DC)	8	OUT2 (TTL Level)
	3	RXD (RS232 Level)	9	IN3+ (RS422 Level)
	4	TXD (RS232 Level)	10	IN3- (RS422 Level)
	5	IN1 (TTL Level)	11	OUT3+ (RS422 Level)
	6	IN2 (TTL Level)	12	OUT3- (RS422 Level)
Camera Link Version	1	+12V to +15V DC	1	Reserved (do not connect)
	2	Reserved (do not connect)	2	Reserved (do not connect)
	3	GND	3	Reserved (do not connect)
			4	Tr - (Exsync GND)
			5	Tr + (Exsync TTL)

Configuration Software

The SVCam cameras come with our SVCapture or ConvCam-software (for CL type, respectively), it allows easy interactive setup of all camera parameters. The software including a SDK (GigE) or DLL (CL) supports Windows XP and Windows 7 including 64 Bit operating system. A LINUX Driver is also available (GigE only). The camera can be configured using the XML file stored inside the camera (GigE). This complies also with the international GenICam standard.

Ordering Guide

Monochrome:	Color:	
svs11002MSGEV2	svs11002CSGEV2	(max. 3.3 Hz)
svs11002MFGEV2	svs11002CFGEV2	(max. 4.7 Hz)
svs11002MUGEV2	svs11002CUGEV2	(max. 6.1 Hz)
svs11002MOLCPC2	svs11002COLCPC2	(max. 4.1 Hz)
svs11002MTLCPC2	svs11002CTLPCPC2	(max. 7.8 Hz)
svs11002MTHCPC	svs11002CTHCPC	(max. 10 Hz)

Option: M58 to F-Mount adapter