

TCCR23080

Bi-telecentric CORE lens for 2/3" detectors, magnification 0.110 x, C-mount



SPECIFICATIONS

Part number (8)		TCCR23080
Magnification	(x)	0.110
Image shape dimension (9)	(Ø, x mm)	Ø=11.1, x=9.6
Phase adjustment (7)		Yes

Object field of view (6)

with 1/3" detector (4.8 x 3.6 mm)	(mm × mm)	43.5 x 32.6
with 1/2.5" detector (5.70 x 4.28 mm)	(mm × mm)	51.7 x 38.8
with 1/2" detector (6.4 x 4.8 mm)	(mm × mm)	58.0 x 43.5
with 1/1.8" detector (7.13 x 5.37 mm)	(mm × mm)	64.6 x 48.7
with 2/3" - 5 MP detector (8.45 x 7.07 mm)	(mm × mm)	76.5 x 64.0

Optical specifications

Working distance (1)	(mm)	226.7
wF/# (2)		8
Telecentricity typical (max) (3)	(deg)	< 0.04 (0.08)
Distortion typical (max) (4)	(%)	< 0.02 (0.10)
Field depth (5)	(mm)	55
CTF @ 70 lp/mm	(%)	> 50

Dimensions

Mount		C
A	(mm)	119
B	(mm)	145
C	(mm)	172
Mass	(g)	3029

Compatibility

LTCLCR080-x, CMHOCR080, CMPTCR080, LTCLHP080-x




NOTES

- Working distance: distance between the front end of the mechanics and the object. Set this distance within +/- 3% of the nominal value for maximum resolution and minimum distortion.
- Working F-number (wF/#): the real F-number of a lens when used as a macro. Lenses with smaller apertures can be supplied on request.
- Maximum slope of chief rays inside the lens: when converted to millirad, it gives the maximum measurement error for any millimeter of object displacement. Typical (average production) values and maximum (guaranteed) values are listed.
- Percent deviation of the real image compared to an ideal, undistorted image: typical (average production) values and maximum (guaranteed) values are listed.
- At the borders of the field depth the image can be still used for measurement but, to get a perfectly sharp image, only half of the nominal field depth should be considered. Pixel size used for calculation is 5.5 µm.
- In case the of vignetting, FOV dimensions are indicated with "Ø = , x = ", where "Ø =" stands for diameter and "x=" indicates the nominal FOV height and length (see [Tech Info](#) for related drawing).
- Indicates the availability of an integrated camera phase adjustment feature.
- Due to the special shape of TCCR120xx it might be necessary to check the mechanical compatibility with your camera.
- Indicates the dimensions and shape of image, where "Ø =" stands for diameter and "x=" indicates the nominal image height and length ([Tech Info](#) for related drawing).

COMPATIBLE PRODUCTS



LTCLHP080-R	Telecentric HP illuminator, beam diameter 100 mm, red
LTCLHP080-G	Telecentric HP illuminator, beam diameter 100 mm, green

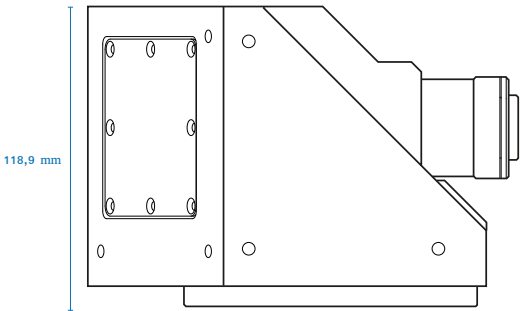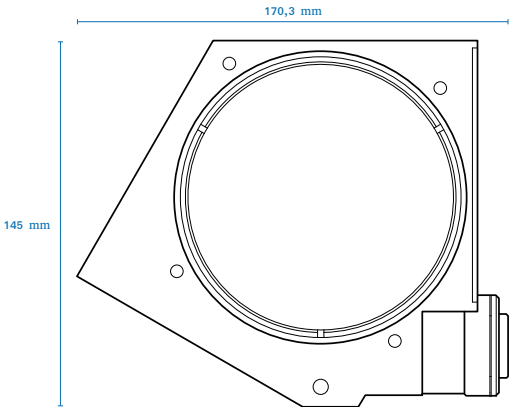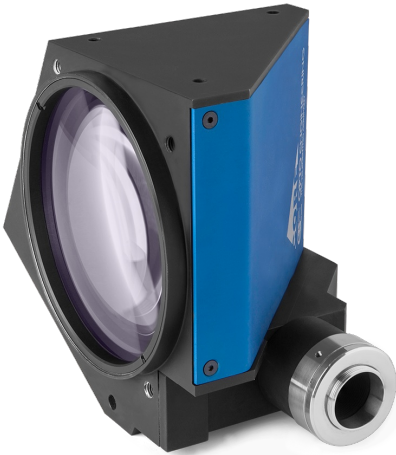

LTCLHP080-B	Telecentric HP illuminator, beam diameter 100 mm, blue
LTCLHP080-W	Telecentric HP illuminator, beam diameter 100 mm, white



LTCLCR080-R	Telecentric CORE illuminator, beam dimensions Ø = 98; x = 90, red
LTCLCR080-G	Telecentric CORE illuminator, beam dimensions Ø = 98; x = 90, green
LTCLCR080-W	Telecentric CORE illuminator, beam dimensions Ø = 98; x = 90, white



CMHOCR080	Clamping mechanics for CORE telecentric lenses and illuminators TCCRxx80 and LTCLCR080-x
-----------	--



CMPTCR080	Mechanical components designed for CORE telecentric lenses and illuminators Ø 80mm
-----------	--