

Matrox 4Sight EV6 at a glance



Reduce service stoppages with a fanless design



Inspect multiple sites through the support for four GigE Vision and four USB3 Vision cameras



Simplify cabling for GigE Vision installations using PoE-enabled ports



Tackle typical vision workloads with a mobile-class embedded seventh-generation Intel Core processor



Connect separately to the factory floor and enterprise networks via two more Gigabit Ethernet ports



Synchronize with other equipment using the integrated real-time digital I/Os with rotary encoder support and RS-232/ RS-485 ports

Machine vision for the factory floor

Matrox® 4Sight EV6 is an industrial computer built for machine vision on the factory floor. Part of a long and solid history, the Matrox 4Sight EV6 is an evolution of its immediate predecessor, integrating a seventh-generation Intel® Core™ processor for ever more demanding multi-camera applications.

A fanless design with multiple ports for GigE Vision® and USB3 Vision® cameras make the Matrox 4Sight EV6 right at home in any production facility, keeping an eye on a single line or many lines. The Matrox 4Sight EV6 is backed by a vendor with a proven track record, delivering optimized machine vision hardware and a software toolkit with a 25-year history of reliable performance.

Multiple ports with power for cameras

Matrox 4Sight EV6 is equipped with four Gigabit Ethernet and four SuperSpeed USB ports for connecting to the full range of available GigE Vision and USB3 Vision cameras. The Gigabit Ethernet ports support power-over-Ethernet (PoE) to further simplify cabling and thus reduce costs when opting for suitable GigE Vision cameras. Powered by a mobile-class embedded processor, Matrox 4Sight EV6 has what it takes to cost-effectively handle typical multi-camera inspections.

Factory and enterprise connectivity

Matrox 4Sight EV6 provides the necessary connectivity for interfacing to other industrial equipment and communicating with enterprise systems. RS-232/RS-485 ports support connections to legacy automation devices, while two additional Gigabit Ethernet ports provide independent connections to industrial and enterprise networks. These networking ports include a hardware-assisted mechanism for PROFINET®3 communication. This mechanism ensures timely response when the automation controller is set up for a short cycle-time or when the processor is too busy performing other tasks.



Industrial-strength design and longevity

The fanless design of the Matrox 4Sight EV6 reduces physical maintenance, eliminating the need to clean or replace an air filter or a worn-out fan. A small, rugged footprint casing and wide ambient operational temperature range allows the Matrox 4Sight EV6 to be mounted either horizontally or vertically in hostile, space-limited locations. Moreover, careful component selections secure the long term availability of the Matrox 4Sight EV6.

Real-time discrete I/Os

Discrete I/O management is achieved through a dedicated hardware-assisted mechanism on the Matrox 4Sight EV6. The mechanism enables output events to occur at precise moments in time, based on elapsed time, or for specific input events. An input event can come directly from a discrete input—including from a rotary encoder—or be count-derived from a discrete input. Programmed output events are stored in a hardware list, which is traversed based on a clock or an input event. The carrying out of an output event results in a state transition, pulse, or pulse train on a specific discrete output. Multiple cascadable hardware timers are available to count or generate specific events. The Matrox 4Sight EV6 has what it takes to effectively synchronize a typical vision application with a manufacturing line.


Software Environment

Microsoft Windows 10 IoT Enterprise¹

Matrox 4Sight EV6 comes with Microsoft Windows 10 IoT Enterprise, which provides the familiarity, performance, and reliability of Windows 10, including the Unified Write Filter (UWF) to prevent corruptions caused by unanticipated power-downs.

Field-proven application development software

Matrox 4Sight EV6 is supported by Matrox Imaging Library (MIL)² software—a comprehensive software development kit (SDK) with a 25-year history of reliable performance. This toolkit features interactive software and programming functions for image capture, processing, analysis, annotation, display, and archiving operations, with the accuracy and robustness needed to tackle the most demanding machine vision applications. These tools are designed to enhance productivity, thereby reducing the time and effort required to bring solutions to market. Refer to the MIL datasheet for more information.

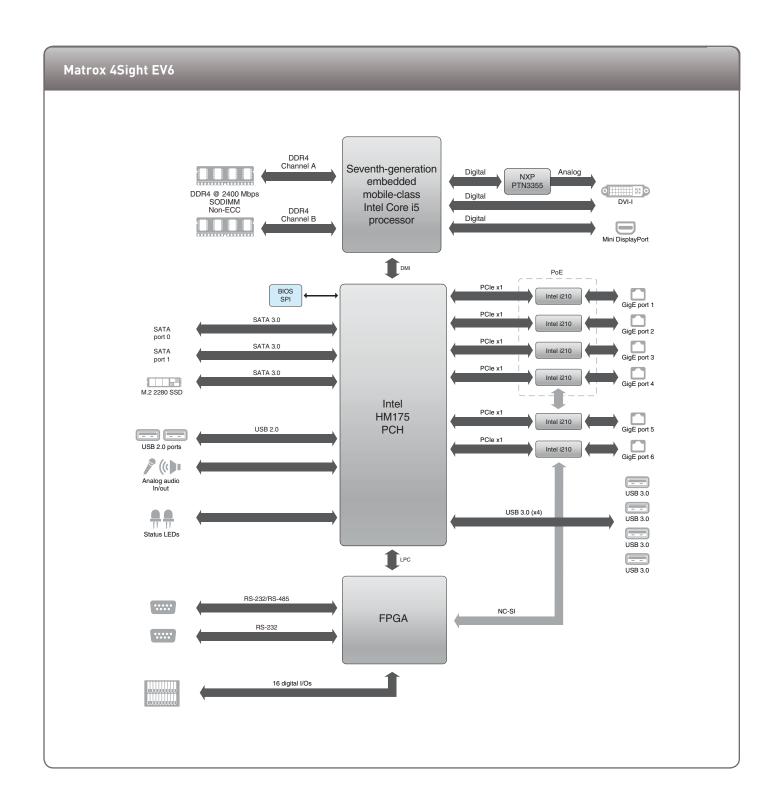

Matrox 4Sight EV6 front and back



- Gigabit Ethernet ports with PoE
 USB 3.0 ports
- 3. Gigabit Ethernet ports
- 4. USB 2.0 ports
- 5. DVI-I output
- 6. Mini DisplayPort™
- 7. Power button
- 8. Digital inputs
- 9. Digital outputs
- 10. Audio out
- 11. Audio in 12. RS-232/RS-485 port

13. RS-232 port

- 14. Power input
- 15. HDD LED
- 16. Power-on LED

Matrox 4Sight EV6 chassis







The Matrox Imaging Advantage



Assured Quality & Longevity

We adhere to industry best practices in all hardware manufacturing and software development; product designs pay careful attention to component selection to secure consistent long-term availability. Matrox Imaging is able to meet Copy Exact and Revision Change Control procurement requirements in particular circumstances, backed by our dedicated team of QA specialists.



Trusted Industry Standards

Matrox Imaging champions industry standards in our design and production. We leverage these standards to deliver quality compatible products, protecting our customers' best interests by ensuring our hardware and software components work with as many third-party products as possible.



Comprehensive Customer Support

Our devoted front-line support and applications teams are on call to offer timely product installation, usage, and integration assistance. Matrox Professional Services delivers deep technical assistance to help customers develop their particular applications in a timely fashion. Services include personalized training and device interfacing as well as application feasibility, prototyping, troubleshooting, and debugging.



Tailored Customer Training

Matrox Vision Academy comprises online and on-premises training for our vision software tools. On-premises intensive training courses are regularly held at Matrox headquarters, and can also be customized for onsite delivery. Vision Academy online training platform hosts a comprehensive set of on-demand videos available when and where needed.



Long-Standing Global Network

Matrox Imaging customers benefit from a global network of distributors who offer complementary products and support, and integrators who build customized vision systems. These relationships are built on years of mutual trust and span the globe, ensuring customer access to only the best assistance in the industry.

Specifications

System

- Intel Core i5-7442EQ
- Intel HM175 Platform Controller Hub (PCH)
- Two (2) 260-pin DDR4-2133/2400 SODIMM slots (dual channel)
- Dual-head graphics support
 - One (1) Mini DiplayPort output
 - Up to 4096x2304 @ 60 Hz
 - One (1) DVI-I display output
 - Up to 1920x1200 @ 60 Hz digital
 - Up to 2048x1536 @ 75 Hz analog
- Six (6) Gigabit Ethernet ports (10/100/1,000)
 - Four (4) Gigabit Ethernet ports with PoE (up to 15.4 W per port)
 - Two (2) standard Gigabit Ethernet ports
- Four (4) USB 3.0 ports
- Two (2) USB 2.0 ports
- Two (2) SATA 3.0 ports (internal)
- One (1) M.2 connector
 - (used by supplied 64 GB M.2 2280 SSD)
- One (1) 24-bit stereo audio input and 24-bit stereo output
- One (1) RS-232 port
- One (1) RS-232/RS-485 port
- Sixteen (16) digital I/Os
 - Eight (8) inputs
 - Up to 24 V
 - Eight (8) outputs (open collector)
 - 100 mA maximum @ 24 VDC
- 64 GB M.2 2280 SATA 3.0 SSD
- Power input: 9 to 27 VDC (nominal 24 VDC @ 4.2 A)

Specifications (Cont.)

Dimensions (L x W x H)

• 22.5 x 15.0 x 6.8 cm (8.86 x 5.90 x 2.68 in)

Chassis

- Four mounting slots
- Fanless enclosure

Certifications

Pending

Ordering Information

Hardware	
Part number	Description
EV615M8	Matrox 4Sight EV6 integrated unit with Intel Core i5-7442EQ, 16 GB DDR4 RAM, 64 GB M.2 MLC SSD, Microsoft Windows 10 IoT Enterprise ¹
EV6PS*	100W AC/DC power adapter (90-264 VAC input/24 VDC output) for Matrox 4Sight EV6

Software

Refer to MIL datasheet.

Endnotes:

 With support for multiple languages. Only one language version can be used at any given time.

- Matrox 4Sight Ev6 is pre-licensed for the MIL interface (GenTL Consumer, GigE Vision, and USB3 Vision), DMIL, and industrial/robot communication run-time packages. All other MIL run-time packages require adding a separate license.
- 3. Certification pending



About Matrox Imaging

Founded in 1976, Matrox is a privately held company based in Montreal, Canada. Imaging, Graphics, and Video divisions provide leading component-level solutions, leveraging the others' expertise and industry relations to provide innovative, timely products.

Matrox Imaging is an established and trusted supplier to top OEMs and integrators involved in machine vision, image analysis, and medical imaging industries. The components consist of smart cameras, vision controllers, I/O cards, and frame grabbers, all designed to provide optimum price-performance within a common software environment.

Contact Matrox imaging.info@matrox.com North America Corporate Headquarters: 1 800-804-6243 or 514-822-6020 Serving: Canada, United States, Latin America, Europe, Asia, Asia-Pacific, and Oceania www.matrox.com/imaging

matrox